



- Very High Power Density
- 2:1 Input Range
- Operating Temperature -40°C to $+105^{\circ}\text{C}$
- Single & Dual Outputs
- 1600 VDC Isolation
- UL Approved
- High Efficiency – up to 89%
- 3 Year Warranty

Specification

Input

Input Voltage Range	• 12 V (9-18 VDC) • 24 V (18-36 VDC) • 48 V (36-75 VDC)
Input Current	• See table
Input Filter	• Pi network
Input Reflected Ripple Current	• JCM15: 20 mA pk-pk, JCM20: 30 mA pk-pk through 12 μH inductor and 47 μF capacitor, 5 Hz to 20 MHz
Input Surge	• 12 V models: 36 VDC for 100 ms • 24 V models: 50 VDC for 100 ms • 48 V models: 100 VDC for 100 ms

Output

Output Voltage	• See table
Output Trim	• $\pm 10\%$ max on single output
Minimum Load	• No minimum load required
Initial Set Accuracy	• $\pm 1\%$ max
Start Up Delay	• 20 ms typical
Line Regulation	• JCM15: $\pm 0.2\%$ max single, $\pm 0.5\%$ max dual • JCM20: $\pm 0.5\%$
Load Regulation	• $\pm 0.5\%$ max single, $\pm 1.0\%$ max dual
Cross Regulation	• $\pm 5\%$ on dual output models (see note 2)
Transient Response	• $< 3\%$ max deviation, recovery to within 1% in 250 μs for a 25% load change
Ripple & Noise	• 100 mV pk-pk, 20 MHz bandwidth, (see note 3)
Overvoltage Protection	• 3.3 V models: 3.9 V typical • 5 V models: 6.2 V typical • 12 V models: 15 V typical • 15 V models: 18 V typical • $\pm 5\text{ V}$ models: $\pm 6.2\text{ V}$ typical • $\pm 12\text{ V}$ models: $\pm 15\text{ V}$ typical • $\pm 15\text{ V}$ models: $\pm 18\text{ V}$ typical
Overload Protection	• 150% of full load typical
Short Circuit Protection	• Trip & restart (hiccup) with auto recovery
Maximum Capacitive Load	• See table
Temperature Coefficient	• $\pm 0.02/^{\circ}\text{C}$ max
Remote On/Off	• On $> 3.0\text{ VDC}$ or open circuit • Off $< 1.2\text{ VDC}$ or short circuit pins 2 & 3

General

Efficiency	• See table
Isolation	• 1600 VDC Input to Output • 1600 VDC Input to Case • 1600 VDC Output to Case
Isolation Capacitance	• JCM15: 1200 pF max, JCM20: 1000 pF max
Switching Frequency	• JCM15: 375 kHz typical, JCM20: 330 kHz typical
Power Density	• JCM15: 38.4 W/in³, JCM20: 51.3 W/in³
MTBF	• $> 560\text{ kHrs}$ to MIL-STD-217F at 25°C, GB

Environmental

Operating Temperature	• -40°C to $+105^{\circ}\text{C}$, derate from 100% load at $+65^{\circ}\text{C}$ to no load at $+105^{\circ}\text{C}$ for JCM15 and 100% load at $+55^{\circ}\text{C}$ to no load at 105°C for JCM20
Case Temperature	• $+105^{\circ}\text{C}$ max
Storage Temperature	• -40°C to $+125^{\circ}\text{C}$
Humidity	• Up to 90%, non-condensing
Cooling	• Natural convection

EMC

Emissions	• EN55022 class A conducted & radiated with external components, see application note
ESD Immunity	• EN61000-4-2, 6 kV contact discharge, 8 kV air discharge, Perf Criteria A
Radiated Immunity	• EN61000-4-3, 10 V/m, Perf Criteria A
EFT/Burst	• EN61000-4-4, level 2, Perf Criteria A*
Surge	• EN61000-4-5, level 2, Perf Criteria A
Conducted Immunity	• EN61000-4-6, 10 Vrms, Perf Criteria A
Magnetic Field	• EN61000-4-8, 1 A/m, Perf Criteria A

Safety

Safety Approvals	• UL60950-1, CAN/CSA C22.2 No.60950-1, UL62368-1
------------------	--

*External input capacitor required, 220 $\mu\text{F}/100\text{ V}$.

Models and Ratings


JCM15/20 XP

Input Voltage	Output Voltage	Output Current	Input Current ⁽¹⁾		Maximum Capacitive Load	Efficiency	Model Number
			No Load	Full Load			
9-18 V	3.3 V	4.000 A	20 mA	1310 mA	1000 μF	85%	JCM1512S3V3
	5.0 V	3.000 A	20 mA	1471 mA	1000 μF	86%	JCM1512S05
	12.0 V	1.300 A	20 mA	1494 mA	330 μF	88%	JCM1512S12
	15.0 V	1.000 A	20 mA	1420 mA	220 μF	89%	JCM1512S15
	±5.0 V	±1.500 A	20 mA	1488 mA	±470 μF	85%	JCM1512D05
	±12.0 V	±0.625 A	20 mA	1420 mA	±220 μF	89%	JCM1512D12
	±15.0 V	±0.500 A	20 mA	1437 mA	±100 μF	89%	JCM1512D15
18-36 V	3.3 V	4.000 A	15 mA	647 mA	1000 μF	86%	JCM1524S3V3
	5.0 V	3.000 A	15 mA	727 mA	1000 μF	87%	JCM1524S05
	12.0 V	1.300 A	15 mA	747 mA	330 μF	88%	JCM1524S12
	15.0 V	1.000 A	15 mA	710 mA	220 μF	89%	JCM1524S15
	±5.0 V	±1.500 A	15 mA	744 mA	±470 μF	85%	JCM1524D05
	±12.0 V	±0.625 A	15 mA	718 mA	±220 μF	88%	JCM1524D12
	±15.0 V	±0.500 A	15 mA	710 mA	±100 μF	89%	JCM1524D15
36-75 V	3.3 V	4.000 A	10 mA	327 mA	1000 μF	85%	JCM1548S3V3
	5.0 V	3.000 A	10 mA	368 mA	1000 μF	86%	JCM1548S05
	12.0 V	1.300 A	10 mA	374 mA	330 μF	88%	JCM1548S12
	15.0 V	1.000 A	10 mA	359 mA	220 μF	88%	JCM1548S15
	±5.0 V	±1.500 A	10 mA	377 mA	±470 μF	84%	JCM1548D05
	±12.0 V	±0.625 A	10 mA	363 mA	±220 μF	87%	JCM1548D12
	±15.0 V	±0.500 A	10 mA	359 mA	±100 μF	88%	JCM1548D15
9-18 V	3.3 V	4.500 A	60 mA	1439 mA	7000 μF	86%	JCM2012S3V3
	5.0 V	4.000 A	60 mA	1852 mA	5000 μF	90%	JCM2012S05
	12.0 V	1.670 A	30 mA	1873 mA	850 μF	89%	JCM2012S12
	15.0 V	1.330 A	30 mA	1873 mA	700 μF	89%	JCM2012S15
	±12.0 V	±0.833 A	30 mA	1873 mA	±470 μF	89%	JCM2012D12
	±15.0 V	±0.667 A	30 mA	1873 mA	±330 μF	89%	JCM2012D15
18-36 V	3.3 V	4.500 A	35 mA	720 mA	7000 μF	86%	JCM2024S3V3
	5.0 V	4.000 A	35 mA	936 mA	5000 μF	89%	JCM2024S05
	12.0 V	1.670 A	25 mA	936 mA	850 μF	89%	JCM2024S12
	15.0 V	1.330 A	25 mA	936 mA	700 μF	89%	JCM2024S15
	±12.0 V	±0.833 A	30 mA	936 mA	±470 μF	89%	JCM2024D12
	±15.0 V	±0.667 A	30 mA	936 mA	±330 μF	89%	JCM2024D15
36-75 V	3.3 V	4.500 A	25 mA	360 mA	7000 μF	86%	JCM2048S3V3
	5.0 V	4.000 A	25 mA	468 mA	5000 μF	89%	JCM2048S05
	12.0 V	1.670 A	15 mA	468 mA	850 μF	89%	JCM2048S12
	15.0 V	1.330 A	15 mA	468 mA	700 μF	90%	JCM2048S15
	±12.0 V	±0.833 A	20 mA	468 mA	±470 μF	89%	JCM2048D12
	±15.0 V	±0.667 A	20 mA	468 mA	±330 μF	89%	JCM2048D15

Notes

1. Input current specified at nominal input.
2. Cross regulation for duals is $\pm 5\%$ when one output is at 100% and the other is varied between 25% and 100%.
3. Measured with 1 μF ceramic capacitor in parallel with a 10 μF electrolytic across output rails on single output models or 1 μF ceramic capacitor only on dual output models.

Mechanical Details

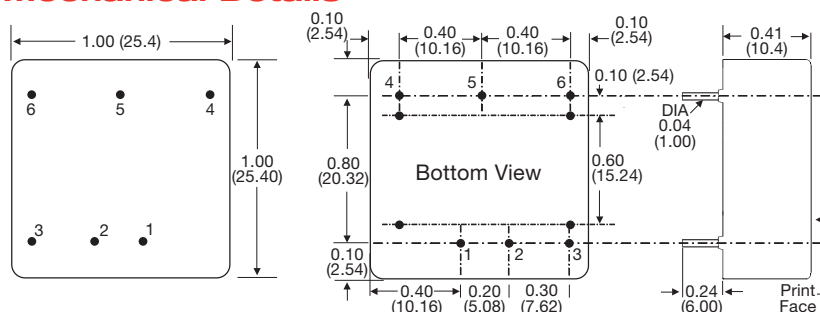


Pin Connections					
Pin	Single	Dual	Pin	Single	Dual
1	+Vin	+Vin	4	+Vout	+Vout
2	-Vin	-Vin	5	Trim	Com
3	Remote On/Off	Remote On/Off	6	-Vout	-Vout

Notes

1. All dimensions are in inches (mm),
2. Weight: 0.04 lbs (20 g) approx.
3. Pin diameter: 0.004 ± 0.002 (1.0 ± 0.05)
4. Pin pitch tolerance: ± 0.014 (± 0.35)
5. Case tolerance: ± 0.02 (± 0.5)

Application Notes

Output Trim



Trim Resistor Values		
Model Number	Trim up 10%	Trim down 10%
JCM-S3V3	8 kΩ	12 kΩ
JCM-S05	10 kΩ	5 kΩ
JCM-S12	20 kΩ	7 kΩ
JCM-S15	20 kΩ	6 kΩ

Approximate values.

Output can be externally trimmed by using the method above.
(Single output models only). For variable trimming, use 100 kΩ potentiometer

Input Filter

