


## Features

- ◆ DIP-24 plastic package
- ◆ I/O isolation voltage 2500 VACrms
- ◆ Supplementary insulation rated for working voltage up to 250 VAC
- ◆ Regulated output
- ◆ Operating temp. range -40°C to +85°C
- ◆ Low coupling capacity
- ◆ Short circuit protection
- ◆ 3-years product warranty

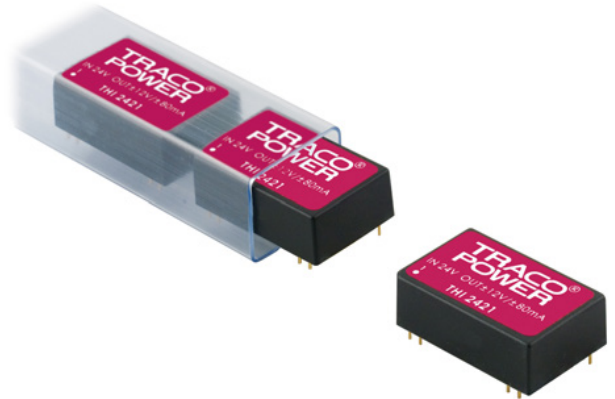

The THI 2 series is a family of dc/dc converter with very high I/O isolation specification. They offer a cost effective solution for all industrial, telecom and medical applications where a supplementary insulation is required. SMD technology and a 100 % production test of the safety barrier ensure a very high reliability of this product.

Models				
Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
THI 0511	5.0 VDC ± 10%	5 VDC	400 mA	62 %
THI 0512		12 VDC	165 mA	63 %
THI 0513		15 VDC	130 mA	64 %
THI 0520		±5 VDC	±100 mA	42 %
THI 0521		±12 VDC	±80 mA	57 %
THI 0522		±15 VDC	±65 mA	57 %
THI 1211	12.0 VDC ± 10%	5 VDC	400 mA	62 %
THI 1212		12 VDC	165 mA	63 %
THI 1213		15 VDC	130 mA	64 %
THI 1220		±5 VDC	±100 mA	45 %
THI 1221		±12 VDC	±80 mA	59 %
THI 1222		±15 VDC	±65 mA	59 %
THI 2411	24 VDC ± 10%	5 VDC	400 mA	62 %
THI 2412		12 VDC	165 mA	63 %
THI 2413		15 VDC	130 mA	64 %
THI 2420		±5 VDC	±100 mA	45 %
THI 2421		±12 VDC	±80 mA	58 %
THI 2422		±15 VDC	±65 mA	58 %

## Input Specifications

Input current no load / full load	5 Vin models:	100 mA / 660 mA typ.
	12 Vin models:	50 mA / 280 mA typ.
	24 Vin models:	30 mA / 140 mA typ.
Surge voltage (1 sec. max.)	5 Vin models:	7.5 V max.
	12 Vin models:	15 V max.
	24 Vin models:	30 V max.
Input filter	Pi-Filter	

## Output Specifications

Voltage set accuracy	±3 %	
Voltage balance (dual output models)	3 % max.	
Regulation	- Input variation	0.5 %
	- Load variation 10-100%	1.0 % max.
Ripple and noise (20 MHz Bandwidth)	50 mVpk-pk max.	
Temperature coefficient	±0.02 %/K	
Current limitation	>120 % constant current	
Short circuit protection	continuous (automatic recovery)	
Capacitive load	single output models:	680 µF max.
	dual output models:	270 µF max. (each output)

## General Specifications


Temperature ranges	- Operating	-40°C to +85°C
	- Case	+95°C max.
	- Storage	-40°C to +125°C
Derating	3 %/K above 70°C	
Humidity (non condensing)	95 % rel. H max.	
Reliability, calculated MTBF (MIL-HDBK-217F, at 25°C, ground benign)	>600'000 h	
Isolation voltage	- I/O Isolation voltage	2'500 VACrms (rated for 250VAC)
	- Isolation test voltage (1 sec.)	6'000 Vpk
Isolation capacitance	- Input/Output	20 pF typ.
Isolation resistance	- Input/Output	>10 Gohm
Switching frequency	25 – 80 kHz (PFM)	

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

## General Specifications

Casing material	plastic (UL 94V-0 rated)
Weight	12.4 g (0.44 oz)
Soldering temperature	max. 265°C / 10 sec

## Outline Dimensions

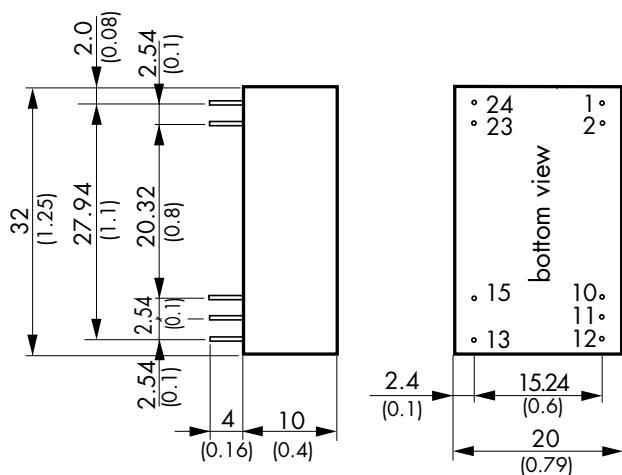

## Pin-Out

Pin	Single	Dual
1	+Vin (VCC)	+Vin (VCC)
2	+Vin (VCC)	+Vin (VCC)
10	No pin	Common
11	No pin	Common
12	-Vout	No pin.
13	+Vout	-Vout
15	No pin	+Vout
23	-Vin (GND)	-Vin (GND)
24	-Vin (GND)	-Vin (GND)

Dimensions in [mm], ( ) = Inch  
 Pin diameter: 0.5 ±0.05 (0.024 ±0.002)  
 Tolerances: ±0.25 (±0.01)  
 Pin pitch tolerances: ±0.05 (±0.002)