

- I/O isolation 5000 VAC (reinforced)
- Wide 1.5:1 input voltage range
- Operating temperature range  
-40 to +80 °C without derating
- Certification according to IEC/EN/ES 60601-1 3rd edition for 2xMOPP and IEC/EN/UL 62368-1



ES 60601-1 IEC 60601-1  
 UL 62368-1 IEC 62368-1

- Short circuit protection
- Regulated outputs
- Low leakage current < 2  $\mu$ A
- Efficiency up to 84 %
- Operation up to 5000 m altitude
- 5-year product warranty

The TRV 2M is a series of 2 Watt DC/DC converters in a compact SIP-9 package with reinforced isolation of 5000 VAC for medical and industrial applications. The series offers a 1.5:1 input voltage range with a nominal input ranging between 5 and 24 VDC. With a continuous short circuit protection and a low leakage current of less than 2 $\mu$ A, this converter series is especially suited to protect any connected interfaces or applied parts to patients. Featuring almost fully regulated outputs this series provides a great level of regulation without affecting the cost efficiency. It is an ideal solution for applications where an unregulated DC/DC converter would not meet your regulation requirements but cost still is a critical factor. Together with an operating temperature range from -40 to +80°C without derating and certifications according to IEC/EN/ES 60601-1 3rd ed. for 2xMOPP and IEC/EN/UL 62368-1 this series is suitable for many different applications where a medical isolation system and short circuit protection is needed.

## Models

Order Code	Input Voltage Range	Output 1		Output 2		Efficiency typ.
		Vnom	I <sub>max</sub>	Vnom	I <sub>max</sub>	
TRV 2-0510M	4.5 - 7 VDC (5 VDC nom.)	3.3 VDC	600 mA			78 %
TRV 2-0511M		5 VDC	400 mA			81 %
TRV 2-0512M		12 VDC	167 mA			83 %
TRV 2-0513M		15 VDC	134 mA			83 %
TRV 2-0521M		+5 VDC	200 mA	-5 VDC	200 mA	82 %
TRV 2-0522M		+12 VDC	83 mA	-12 VDC	83 mA	83 %
TRV 2-0523M		+15 VDC	67 mA	-15 VDC	67 mA	81 %
TRV 2-1210M	9.6 - 14.4 VDC (12 VDC nom.)	3.3 VDC	600 mA			79 %
TRV 2-1211M		5 VDC	400 mA			81 %
TRV 2-1212M		12 VDC	167 mA			84 %
TRV 2-1213M		15 VDC	134 mA			83 %
TRV 2-1221M		+5 VDC	200 mA	-5 VDC	200 mA	81 %
TRV 2-1222M		+12 VDC	83 mA	-12 VDC	83 mA	83 %
TRV 2-1223M		+15 VDC	67 mA	-15 VDC	67 mA	82 %
TRV 2-1510M	12 - 18 VDC (15 VDC nom.)	3.3 VDC	600 mA			79 %
TRV 2-1511M		5 VDC	400 mA			81 %
TRV 2-1512M		12 VDC	167 mA			84 %
TRV 2-1513M		15 VDC	134 mA			83 %
TRV 2-1521M		+5 VDC	200 mA	-5 VDC	200 mA	81 %
TRV 2-1522M		+12 VDC	83 mA	-12 VDC	83 mA	83 %
TRV 2-1523M		+15 VDC	67 mA	-15 VDC	67 mA	80 %

<b>TRV 2-2410M</b>	19.2 - 28.8 VDC (24 VDC nom.)	3.3 VDC	600 mA			78 %
<b>TRV 2-2411M</b>		5 VDC	400 mA			80 %
<b>TRV 2-2412M</b>		12 VDC	167 mA			82 %
<b>TRV 2-2413M</b>		15 VDC	134 mA			82 %
<b>TRV 2-2421M</b>		+5 VDC	200 mA	-5 VDC	200 mA	81 %
<b>TRV 2-2422M</b>		+12 VDC	83 mA	-12 VDC	83 mA	81 %
<b>TRV 2-2423M</b>	+15 VDC	67 mA	-15 VDC	67 mA	80 %	

Note - If the input will be switched electromechanically, use an external 47 µF/63 V E/C. to avoid voltage transient.

## Input Specifications

Input Current	- At no load	5 Vin models: 5 mA typ. (3.3 Vout model) 5 mA typ. (5 Vout model) 20 mA typ. (12 Vout model) 20 mA typ. (15 Vout model) 5 mA typ. (5 / -5 Vout model) 20 mA typ. (12 / -12 Vout model) 25 mA typ. (15 / -15 Vout model)
		12 Vin models: 4 mA typ. (3.3 Vout model) 4 mA typ. (5 Vout model) 10 mA typ. (12 Vout model) 10 mA typ. (15 Vout model) 4 mA typ. (5 / -5 Vout model) 10 mA typ. (12 / -12 Vout model) 10 mA typ. (15 / -15 Vout model)
		15 Vin models: 4 mA typ. (3.3 Vout model) 4 mA typ. (5 Vout model) 8 mA typ. (12 Vout model) 8 mA typ. (15 Vout model) 4 mA typ. (5 / -5 Vout model) 8 mA typ. (12 / -12 Vout model) 8 mA typ. (15 / -15 Vout model)
		24 Vin models: 3 mA typ. (3.3 Vout model) 3 mA typ. (5 Vout model) 6 mA typ. (12 Vout model) 6 mA typ. (15 Vout model) 3 mA typ. (5 / -5 Vout model) 6 mA typ. (12 / -12 Vout model) 6 mA typ. (15 / -15 Vout model)
	- At full load	5 Vin models: 510 mA typ. 12 Vin models: 210 mA typ. 15 Vin models: 170 mA typ. 24 Vin models: 105 mA typ.
Surge Voltage		5 Vin models: 15 VDC max. (1 s max.) 12 Vin models: 25 VDC max. (1 s max.) 15 Vin models: 25 VDC max. (1 s max.) 24 Vin models: 35 VDC max. (1 s max.)
Recommended Input Fuse		5 Vin models: 1'000 mA (slow blow) 12 Vin models: 500 mA (slow blow) 15 Vin models: 500 mA (slow blow) 24 Vin models: 315 mA (slow blow) (The need of an external fuse has to be assessed in the final application.)
Input Filter		Internal Capacitor

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

## Output Specifications

Voltage Set Accuracy		$\pm 3\%$ max. (60% load: 3.3, 5, $\pm 5$ Vout models) $\pm 3\%$ max. (90% load: other models)
Regulation	- Input Variation (Vmin - Vmax)	single output models: <b>2% max.</b> dual output models: <b>2% max.</b>
	- Load Variation (10 - 100%)	single output models: <b>4% max.</b> dual output models: <b>4% max.</b> (Output 1) <b>4% max.</b> (Output 2)
	- Voltage Balance (symmetrical load)	dual output models: <b>4% max.</b>
	- Cross Regulation (25% / 100% asym. load)	dual output models: <b>4% max.</b>
Ripple and Noise (20 MHz Bandwidth)	- single output	3.3 Vout models: <b>100 mVp-p typ.</b> 5 Vout models: <b>100 mVp-p typ.</b> 12 Vout models: <b>125 mVp-p typ.</b> 15 Vout models: <b>125 mVp-p typ.</b>
	- dual output	5 / -5 Vout models: <b>100 / 100 mVp-p typ.</b> 12 / -12 Vout models: <b>125 / 125 mVp-p typ.</b> 15 / -15 Vout models: <b>125 / 125 mVp-p typ.</b>
Capacitive Load	- single output	3.3 Vout models: <b>2'000 <math>\mu</math>F max.</b> 5 Vout models: <b>820 <math>\mu</math>F max.</b> 12 Vout models: <b>470 <math>\mu</math>F max.</b> 15 Vout models: <b>470 <math>\mu</math>F max.</b>
	- dual output	5 / -5 Vout models: <b>470 / 470 <math>\mu</math>F max.</b> 12 / -12 Vout models: <b>220 / 220 <math>\mu</math>F max.</b> 15 / -15 Vout models: <b>220 / 220 <math>\mu</math>F max.</b>
Minimum Load		Not required
Temperature Coefficient		$\pm 0.03$ %/K max.
Short Circuit Protection		Continuous, Automatic recovery

## Safety Specifications

Safety Standards	- IT / Multimedia Equipment	EN 62368-1 IEC 62368-1 UL 62368-1
	- Medical Equipment	EN 60601-1 IEC 60601-1 ANSI/AAMI ES 60601-1 2 x MOPP (Means Of Patient Protection)
	- Certification Documents	<a href="http://www.tracopower.com/overview/trv2m">www.tracopower.com/overview/trv2m</a>
Pollution Degree		PD 2
Over Voltage Category		Not mains connected

## EMC Specifications

EMI Emissions	- Conducted Emissions	EN 60601-1-2 edition 4 (Medical Devices) EN 55011 class A (with external filter) EN 55011 class B (with external filter) EN 55032 class A (with external filter) EN 55032 class B (with external filter)
	- Radiated Emissions	EN 55011 class A (with external filter) EN 55011 class B (with external filter) EN 55032 class A (with external filter) EN 55032 class B (with external filter)
		External filter proposal: <a href="http://www.tracopower.com/overview/trv2m">www.tracopower.com/overview/trv2m</a>

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

EMS Immunity	<ul style="list-style-type: none"> <li>- Electrostatic Discharge</li> <li>- RF Electromagnetic Field</li> <li>- EFT (Burst) / Surge</li> <li>- Conducted RF Disturbances</li> <li>- PF Magnetic Field</li> </ul>	EN 55024 (IT Equipment) EN 60601-1-2 edition 4 (Medical Devices) Air: EN 61000-4-2, ±15 kV, perf. criteria A Contact: EN 61000-4-2, ±8 kV, perf. criteria A EN 61000-4-3, 10 V/m, perf. criteria A EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±2 kV, perf. criteria A External filter proposal: <a href="http://www.tracopower.com/overview/trv2m">www.tracopower.com/overview/trv2m</a> EN 61000-4-6, 10 Vrms, perf. criteria A Continuous: EN 61000-4-8, 100 A/m, perf. criteria A 1 s: EN 61000-4-8, 1000 A/m, perf. criteria A
--------------	--	---

## General Specifications

Relative Humidity	95% max. (non condensing)	
Temperature Ranges	<ul style="list-style-type: none"> <li>- Operating Temperature</li> <li>- Case Temperature</li> <li>- Storage Temperature</li> </ul>	-40°C to +95°C +105°C max. -55°C to +125°C
Power Derating	- High Temperature	See application note: <a href="http://www.tracopower.com/overview/trv2m">www.tracopower.com/overview/trv2m</a>
Cooling System	Natural convection (20 LFM)	
Altitude During Operation	5'000 m max.	
Switching Frequency	180 - 360 kHz (PFM)	
Insulation System	Reinforced Insulation (meet 2MOPP)	
Isolation Test Voltage	<ul style="list-style-type: none"> <li>- Input to Output, 60 s</li> <li>- Input to Output, 1 s</li> </ul>	5'000 VAC 7'000 VDC
Creepage	- Input to Output	8 mm min.
Clearance	- Input to Output	8 mm min.
Isolation Resistance	- Input to Output, 500 VDC	10'000 MΩ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	10 pF typ. 20 pF max.
Leakage Current	- Touch Current	2 μA max. (240 VAC, 60 Hz)
Reliability	- Calculated MTBF	10'410'000 h (MIL-HDBK-217F, ground benign)
Washing Process	See Cleaning Guideline: <a href="http://www.tracopower.com/info/cleaning.pdf">www.tracopower.com/info/cleaning.pdf</a>	Allowed (hermetical product)
Environment	<ul style="list-style-type: none"> <li>- Vibration</li> <li>- Mechanical Shock</li> <li>- Thermal Shock</li> </ul>	MIL-STD-810F 7.6 g, 3 axis, 60 min, 20-2000 Hz MIL-STD-810F 50 g, 3 axis, 11 ms MIL-STD-810F -55°C to +125°C, 72 cycles, 30 min each
Housing Material	Non-conductive Plastic (UL 94 V-0 rated)	
Potting Material	Silicone (UL 94 V-0 rated)	
Pin Material	Tinned Copper	
Pin Foundation Plating	Nickel (2 - 3 μm)	
Pin Surface Plating	Tin (3 - 5 μm), matte	
Housing Type	Plastic Case	
Mounting Type	PCB Mount	
Connection Type	THD (Through-Hole Device)	
Footprint Type	SIP9	
Soldering Profile	Wave Soldering 260°C / 6 s max.	
Weight	4.8 g	

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Environmental Compliance - REACH Declaration

- RoHS Declaration

[www.tracopower.com/info/reach-declaration.pdf](http://www.tracopower.com/info/reach-declaration.pdf)

REACH SVHC list compliant

REACH Annex XVII compliant

[www.tracopower.com/info/rohs-declaration.pdf](http://www.tracopower.com/info/rohs-declaration.pdf)

Exemptions: 7a, 7c-I

(RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).)


The SCIP number is provided on request.)

## Supporting Documents

Overview Link (for additional Documents)

[www.tracopower.com/overview/trv2m](http://www.tracopower.com/overview/trv2m)

## Outline Dimensions

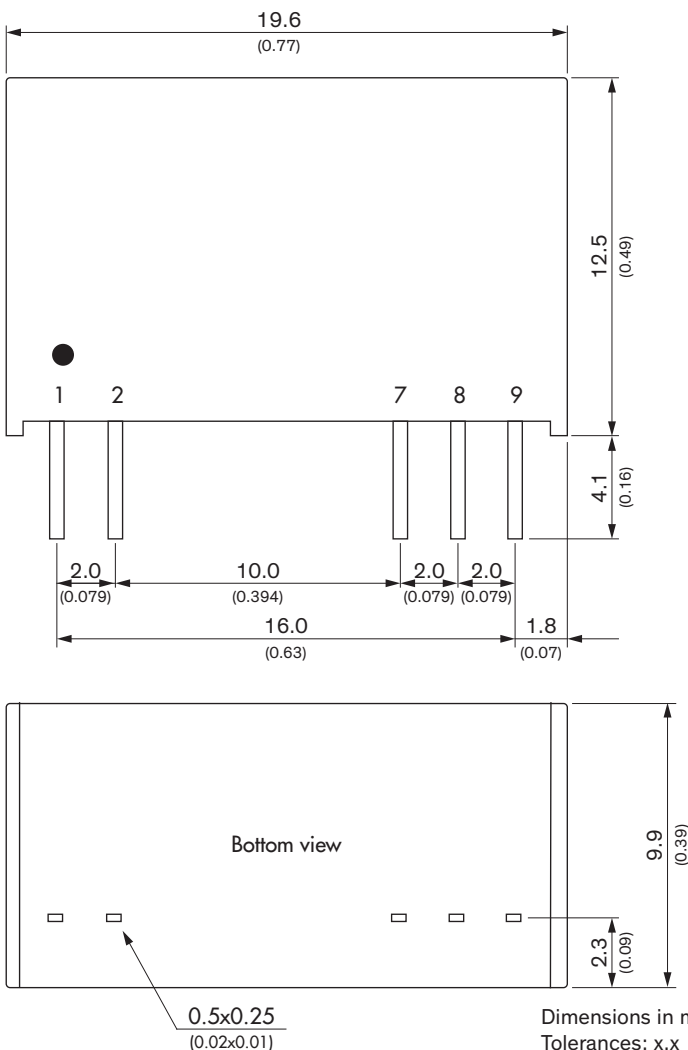

## Pinout

Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
7	-Vout	-Vout
8	No Pin	Common
9	+Vout	+Vout