


- **Highly cost efficient design**
- **Pin compatible with LMxx linear regulators**
- **Operation temperature. range –40°C to +85°C**
- **Efficiency up to 92%**
- **Wide input operating range 6-36 VDC**
- **Short circuit protection**
- **Excellent line / load regulation**
- **3-year product warranty**



The TSR 1E is a 1 Ampere step-down switching regulator series and a drop-in replacement for inefficient 78xx linear regulators. This series comes in a standard plastic SIP-3 case and complements our existing POL portfolio with a series focusing strongly on a cost efficient design while maintaining our quality standards. The effective design allows full load operation up to +60°C ambient temperature without the need of any heat sink or forced cooling. The TSR 1E switching regulators provide other significant features over linear regulators, i.e. better output accuracy, lower standby current and no requirement of external capacitors. The TSR 1E series offers a broad application range in many environments and is especially suited for high volume projects where the series will help to reduce production cost by delivering not only a highly cost efficient but also reliable solution.

<b>Models</b>				
<b>Order Code</b>	<b>Output Current max.</b>	<b>Input Voltage Range</b>	<b>Output Voltage nom.</b>	<b>Efficiency typ.</b>
<b>TSR 1-2433E</b>	1'000 mA	6 - 36 VDC (24 VDC nom.)	3.3 VDC	88 %
<b>TSR 1-2450E</b>		7 - 36 VDC (24 VDC nom.)	5 VDC	92 %

## Input Specifications

Recommended Input Fuse	(The need of an external fuse has to be assessed in the final application.)
Input Filter	Internal Capacitor

## Output Specifications

Voltage Set Accuracy	±4% max.
Regulation	- Input Variation (Vmin - Vmax) - Load Variation (10 - 100%)
Ripple and Noise	- 20 MHz Bandwidth
Capacitive Load	1'000 µF max.
Minimum Load	Not required
Temperature Coefficient	±0.03 %/K max.
Short Circuit Protection	Continuous, Automatic recovery
Output Current Limitation	350% max. of Iout max.

## EMC Specifications


EMI Emissions	- Conducted Emissions - Radiated Emissions	EN 55032 class B (with external filter) EN 55032 class B (with external filter)
---------------	---	--

## General Specifications

Relative Humidity	95% max. (non condensing)
Temperature Ranges	- Operating Temperature - Case Temperature - Storage Temperature
Power Derating	- High Temperature
Over Temperature Protection Switch Off	- Protection Mode
Cooling System	Natural convection (20 LFM)
Switching Frequency	520 kHz typ. (PWM)
Insulation System	Non-isolated
Reliability	- Calculated MTBF
Housing Material	Plastic (UL 94 V-0 rated)
Pin Material	Phosphor Bronze (C5191)
Pin Foundation Plating	Nickel (1 µm min.)
Pin Surface Plating	Tin (3 µm min.), bright
Connection Type	THD (Through-Hole Device)
Weight	1.6 g
Environmental Compliance	- Reach - RoHS

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

## Outline Dimensions

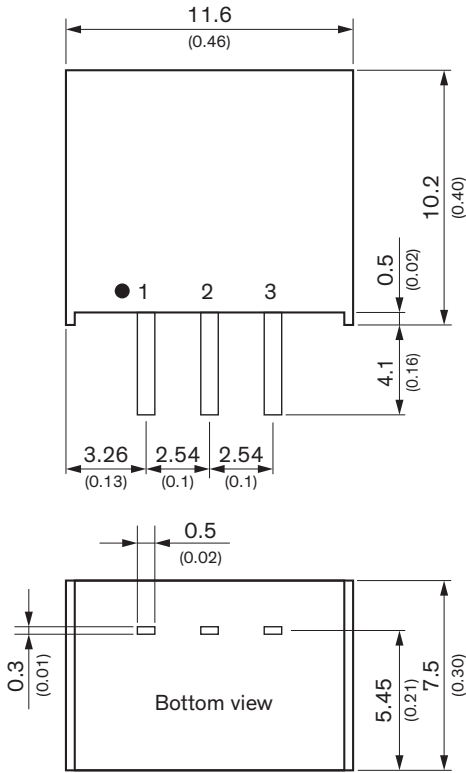

Pinout	
Pin	Function
1	+Vin
2	GND
3	+Vout

Dimensions in mm (inch)  
Tolerances: x.x ±0.5 (±0.02)  
x.xx ±0.25 (±0.01)